

Thank you for your choice of the Graham Farish Stanier 'Princess Coronation' 4-6-2 locomotive.

Running in

The mechanism of this model requires running in (without a load) for approximately 1 hour in each direction at moderate speed.

Curves

This locomotive should be run on track with curves of a minimum of second radius (**approx. 10.5 inches / 260 mm**).

DCC Decoder fitting to non DCC fitted loco



Run in as above using a DC power supply before fitting a DCC decoder

This model has an 6-pin NMRA/NEM 651 socket in the tender suitable for a decoder with an appropriate plug. Align the decoder as indicated on diagram overleaf

Lubrication

When required, sparingly lubricate the motor bearings using plastic compatible light oil and the gear train with model grease. Suitable lubricants are Bachmann E-Z Lube item 99984 or Woodland Scenics 'HobbyLube' Lite Oil item HL654.


Add-on detail parts

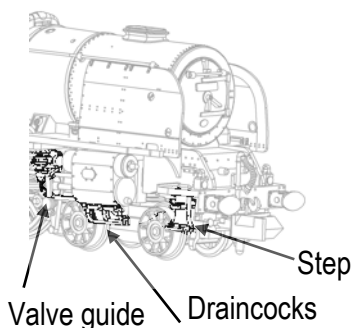


The parts may not be suitable for models used on tight curves - please check the running on layout before final fitting.

Graham Farish N scale models should not be run on a DCC supply unless a DCC decoder has been fitted as damage to the motor may result

The locomotive body is secured by the screws indicated *

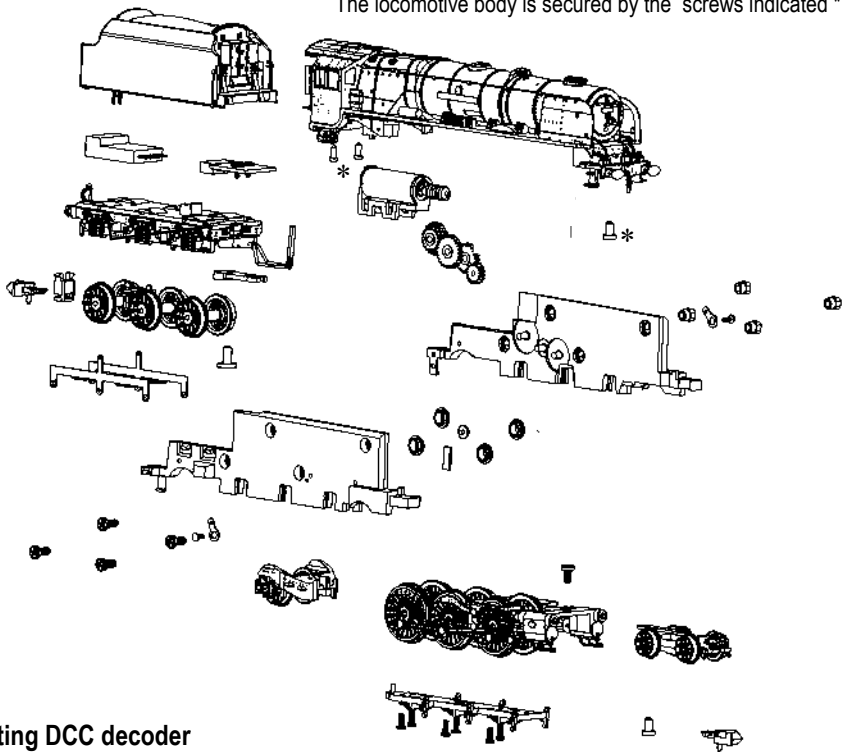

Fitting DCC decoder

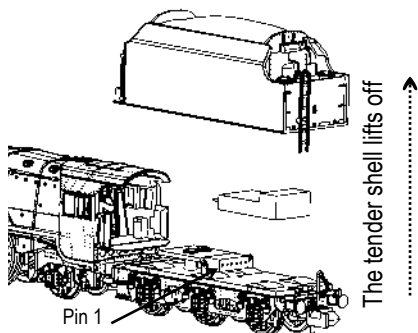

Parts
Please contact the Service
Department for spare parts availability
Replacement couplings are available
in retail packs, item 379-401

Bachmann Europe Plc

Moat Way, Barwell, Leicestershire,
LE9 8EY

Tel: 01455 841756

www.bachmann.co.uk